


40' x 40' STANDARD BEE YARD

the smaller 20' x 20' yard uses 5' spacing between 8 steel and 8 fiberglass posts & the corner brace kit is an optional item

20 X 20 Low Risk Bee Yard Parts List: Last update 02-01-06

- ¼ roll 82.5' 39" light high tensile woven wire
- 1/8 roll 165' high tensile barbed wire
- 3 1/2" ground rods and ground rod clamps
- 5 lead out wire clamps
- 50 feet 12.5 gauge double insulated lead out cable
- 6 black insulated gate handles
- 1 10 watt solar collector panel
- 1 12V charger-Parmak MAG 12 UO
- 1 deep cycle battery wet cell SRM24
- 8 4' section PVC 1 1/2" pipes
- 8 6 1/2" steel tee posts (with 2 clips ea.)
- 20 tee post clips
- 40 8.25" aluminum ties
- 8 7/8" x 7' fiberglass posts
- 40 fiberglass Post U clips
- 1 **OPTION** corner brace kit
- 4 **OPTION** 6 1/2" steel tee posts for corner brace kit
- 6 lb. **OPTION** smooth brace wire

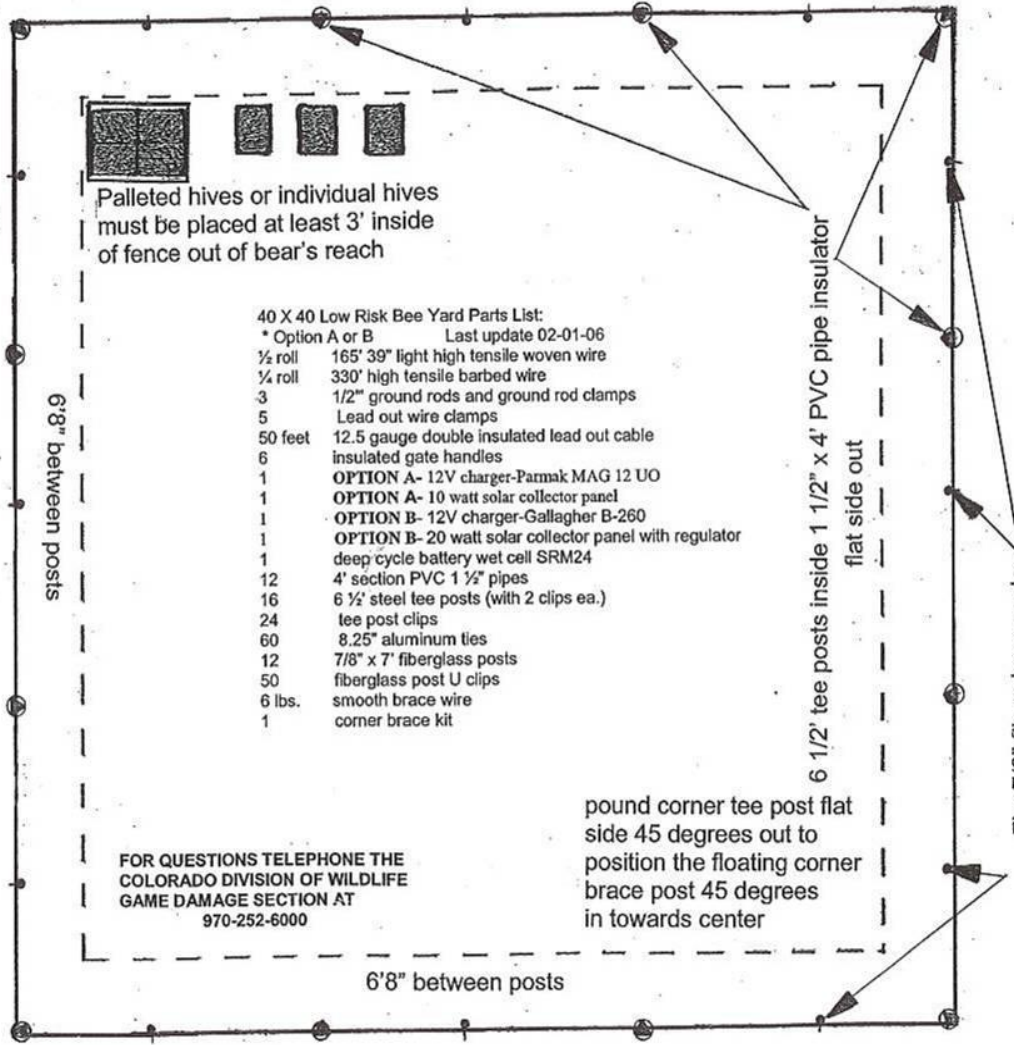

Palleted hives or individual hives must be placed at least 3' inside of fence out of bear's reach

- 40 X 40 Low Risk Bee Yard Parts List:
 * Option A or B Last update 02-01-06
- ½ roll 165' 39" light high tensile woven wire
 - ¼ roll 330' high tensile barbed wire
 - 3 1/2" ground rods and ground rod clamps
 - 5 Lead out wire clamps
 - 50 feet 12.5 gauge double insulated lead out cable
 - 6 insulated gate handles
 - 1 **OPTION A-** 12V charger-Parmak MAG 12 UO
 - 1 **OPTION A-** 10 watt solar collector panel
 - 1 **OPTION B-** 12V charger-Gallagher B-260
 - 1 **OPTION B-** 20 watt solar collector panel with regulator
 - 1 deep cycle battery wet cell SRM24
 - 12 4' section PVC 1 1/2" pipes
 - 16 6 1/2" steel tee posts (with 2 clips ea.)
 - 24 tee post clips
 - 60 8.25" aluminum ties
 - 12 7/8" x 7' fiberglass posts
 - 50 fiberglass post U clips
 - 6 lbs. smooth brace wire
 - 1 corner brace kit

FOR QUESTIONS TELEPHONE THE COLORADO DIVISION OF WILDLIFE GAME DAMAGE SECTION AT 970-252-6000

pound corner tee post flat side 45 degrees out to position the floating corner brace post 45 degrees in towards center

40 X 40 High Risk Bee Yard Parts List: Last update 02-0

- ½ roll 165' 39" light high tensile woven wire
- ¼ roll 330' high tensile barbed wire
- 5 1/2" ground rods and ground rod clamps
- 5 lead out wire clamps
- 65 feet 12.5 gauge double insulated lead out cable
- 6 black insulated gate handles
- 1 64 watt US 64 solar collector panel
- 1 12V charger-Gallagher B-1200
- 1 Solar Mounting Frame
- 1 deep cycle battery wet cell SRM27
- 12 4' section PVC 1 1/2" pipes
- 16 6 1/2" steel tee posts (line posts with 2 clips ea.)
- 25 tee post clips
- 60 8.25" aluminum ties
- 12 7/8" x 7' fiberglass posts
- 50 fiberglass post U clips
- 6 lb. smooth brace wire
- 1 corner brace kit